

crazy about

micro milling

CRAZYMILL COOL MICRO

A
STAR
IS
BORN





Your benefits

NEW

The most important features

- Material-specific cutting geometry S and SX
- High cutting-edge stability and robustness
- Innovative and efficient cooling concept
- Ultra-fine carbide grade and homogeneous coating

Your advantages

- High-performance milling of difficult-to-machine materials
- Milling with high profile precision
- No overheating of the cutting edges and a chip-free milling zone
- Workpiece almost burr-free

Your benefits

- Excellent surface quality
- Up to 3 x shorter milling process
- Up to 2 x longer tool life
- Highest process reliability under the most challenging conditions

NEW

CrazyMill Cool Micro


THE NEW HIGH-PERFORMANCE MICRO-ENDMILL FOR DIFFICULT-TO-MACHINE MATERIALS

CrazyMill Cool Micro is a new micro-milling tool specially developed for difficult and very difficult-to-machine materials. It is available in diameters ranging from 0.2 mm - 1.0 mm for a maximum milling depth of 5 x d.

By developing this new product, the engineers at Mikron Tool were the first to succeed in transferring complex high-performance cutting geometries to micro-endmill. The new CrazyMill Cool Micro set unprecedented benchmarks.

1. Challenge

Tool deflection



Tool deflection constitutes a significant problem for small diameter milling operations, which is further exacerbated when processing difficult-to-machine materials due to the higher cutting forces involved.

Solution

Custom geometry for optimum cutting performance and stability



Cutting edge type	Deflection	Cutting-edge stability
Sharp	●	●
Rounded	●	●
CrazyMill Cool Micro	●	●

The newly developed geometry combines cutting performance with robustness, minimising tool deflection and thus increasing tool stability. That results in a significantly higher material removal rate whilst maintaining a consistent shape and ensuring a longer tool life.

NEW

2. Challenge


Difficult-to-machine materials

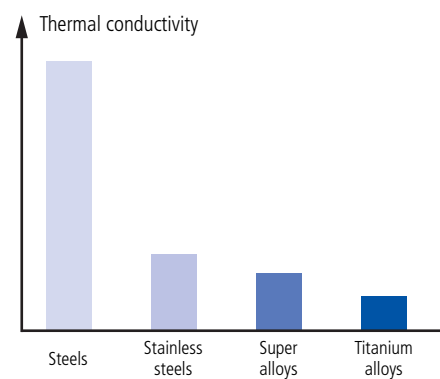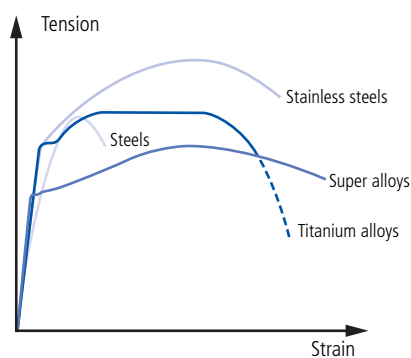

Titanium and heat-resistant alloys are notable for their high toughness and low thermal conductivity. Machining produces extreme temperatures on the cutting edges, resulting in high tool wear.

Solution

Innovative cooling concept

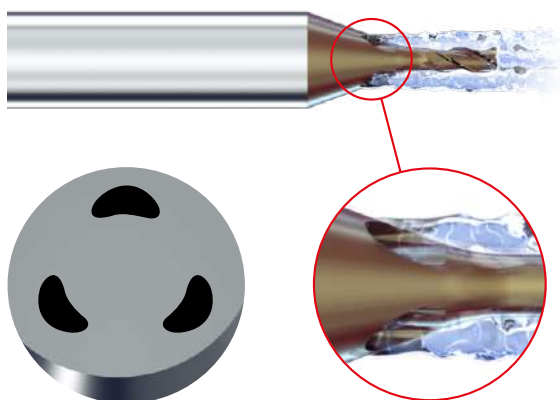

The innovative, patented cooling concept solves this problem. The cooling lubricant is applied directly and extensively to the cutting edges, thereby allowing the heat to dissipate. The result is higher cutting speeds and a significantly higher material removal rate.

The continuous coolant jet ensures that the chips are continuously flushed out of the milling zone. This prevents them from being milled several times, which would damage the milling tool and the milled surface. This ensures a long tool life and an excellent surface finish.

NEW


CrazyMill Cool Micro

THE NEW HIGH-PERFORMANCE MICRO-ENDMILL FOR DIFFICULT-TO-MACHINE MATERIALS

3. Challenge

Different material-specific properties

Specific cutting force $kc_{1.1}$

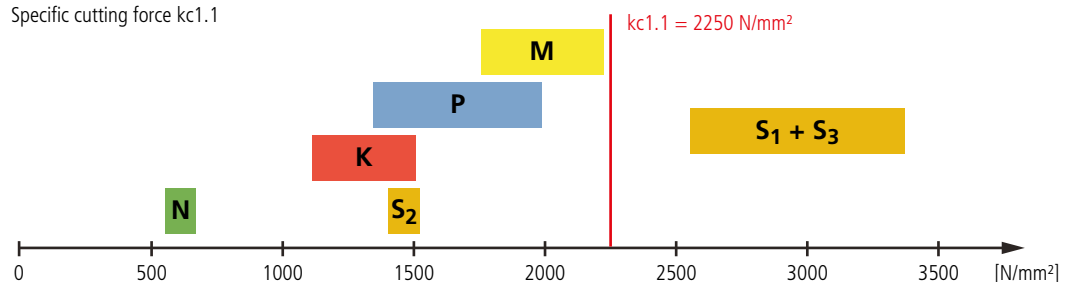


Close attention must be paid to the different mechanical properties of various material categories* in micro-machining. The cutting forces of superalloys and CoCr alloys are up to 45% higher than those of stainless steel and titanium ($kc_{1.1}$ values). As a result, the cutting edge is subjected to high mechanical stress, leading to chipping.

*See page 18: Material groups

Solution

Material-specific cutting-edge geometries

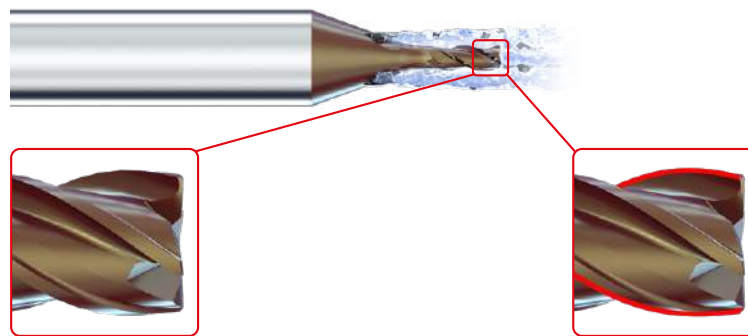

Geometry S M P K N S₂

Stainless steels, structural steels, cast iron, non-ferrous metals and titanium alloys

Geometry with higher cutting performance for materials with a specific cutting force lower than 2250 N/mm².

Geometry SX S₁ S₃

Heat-resistant alloys (e.g. Inconel, Monel, Nilo, Hastelloy) and CoCr alloys

Geometry with dedicated cutting edge protection for materials with a specific cutting force greater than 2250 N/mm².

NEW

4. Challenge

Miniaturisation of tools



Miniaturisation presents the challenge of realising complex geometries with diameters less than 1 mm. The smaller the tool's cross-section, the more challenging it becomes to mill complex geometries while ensuring that quality requirements and tolerances are met.

Solution

Suitable production equipment



State-of-the-art grinders with hydrostatic bearings and grinding wheels that meet the latest technological standards are crucial for this purpose. High-precision digital measuring instruments that detect deviations up to a micrometre guarantee perfect results.

The team at Mikron Tool is well trained in using such tools and producing micro tools that meet the highest precision requirements.

NEW

CrazyMill Cool Micro

THE NEW HIGH-PERFORMANCE MICRO-ENDMILL FOR DIFFICULT-TO-MACHINE MATERIALS

5. Challenge

Carbide and coating



With regard to **carbide** – especially with micro tools, the biggest challenge is to strike a balance between high ultimate strength and wear resistance. Moreover, it must be suitable for delicate geometries and high-precision cutting edges.

Even the **coating** has to meet the highest requirements. It must withstand high temperatures to prevent the material from sticking. High surface finishing and perfect geometry profile must also be ensured while avoiding rounding of the cutting edges.

Solution

Ultra-fine carbide grade and state-of-the-art coating technology

To meet the stringent requirements, Mikron Tool uses state-of-the-art ultra-fine carbide grades offering high wear resistance coupled with fracture toughness with grain sizes below 0.5 µm.

The revolutionary eXedur SNP coating of the micro-milling tools provides excellent wear resistance even at extreme operating temperatures. High layer smoothness and precise layer thickness protect all contours and cutting edges evenly. The result: high process safety. This coating significantly increases tool life without compromising cutting performance.

Mikron Tool micro-milling tool



New



Edge wear
after 20 m
in CoCr alloy

Conventional micro-milling tool



New



Edge wear
after 7 m
in CoCr alloy

NEW

6. Challenge

Burr formation




Another challenge is the massive burr formation, which is more pronounced when milling challenging materials.





Solution

Nearly burr free



The material-specific geometries cut the material so perfectly that burr formation is nearly avoided.

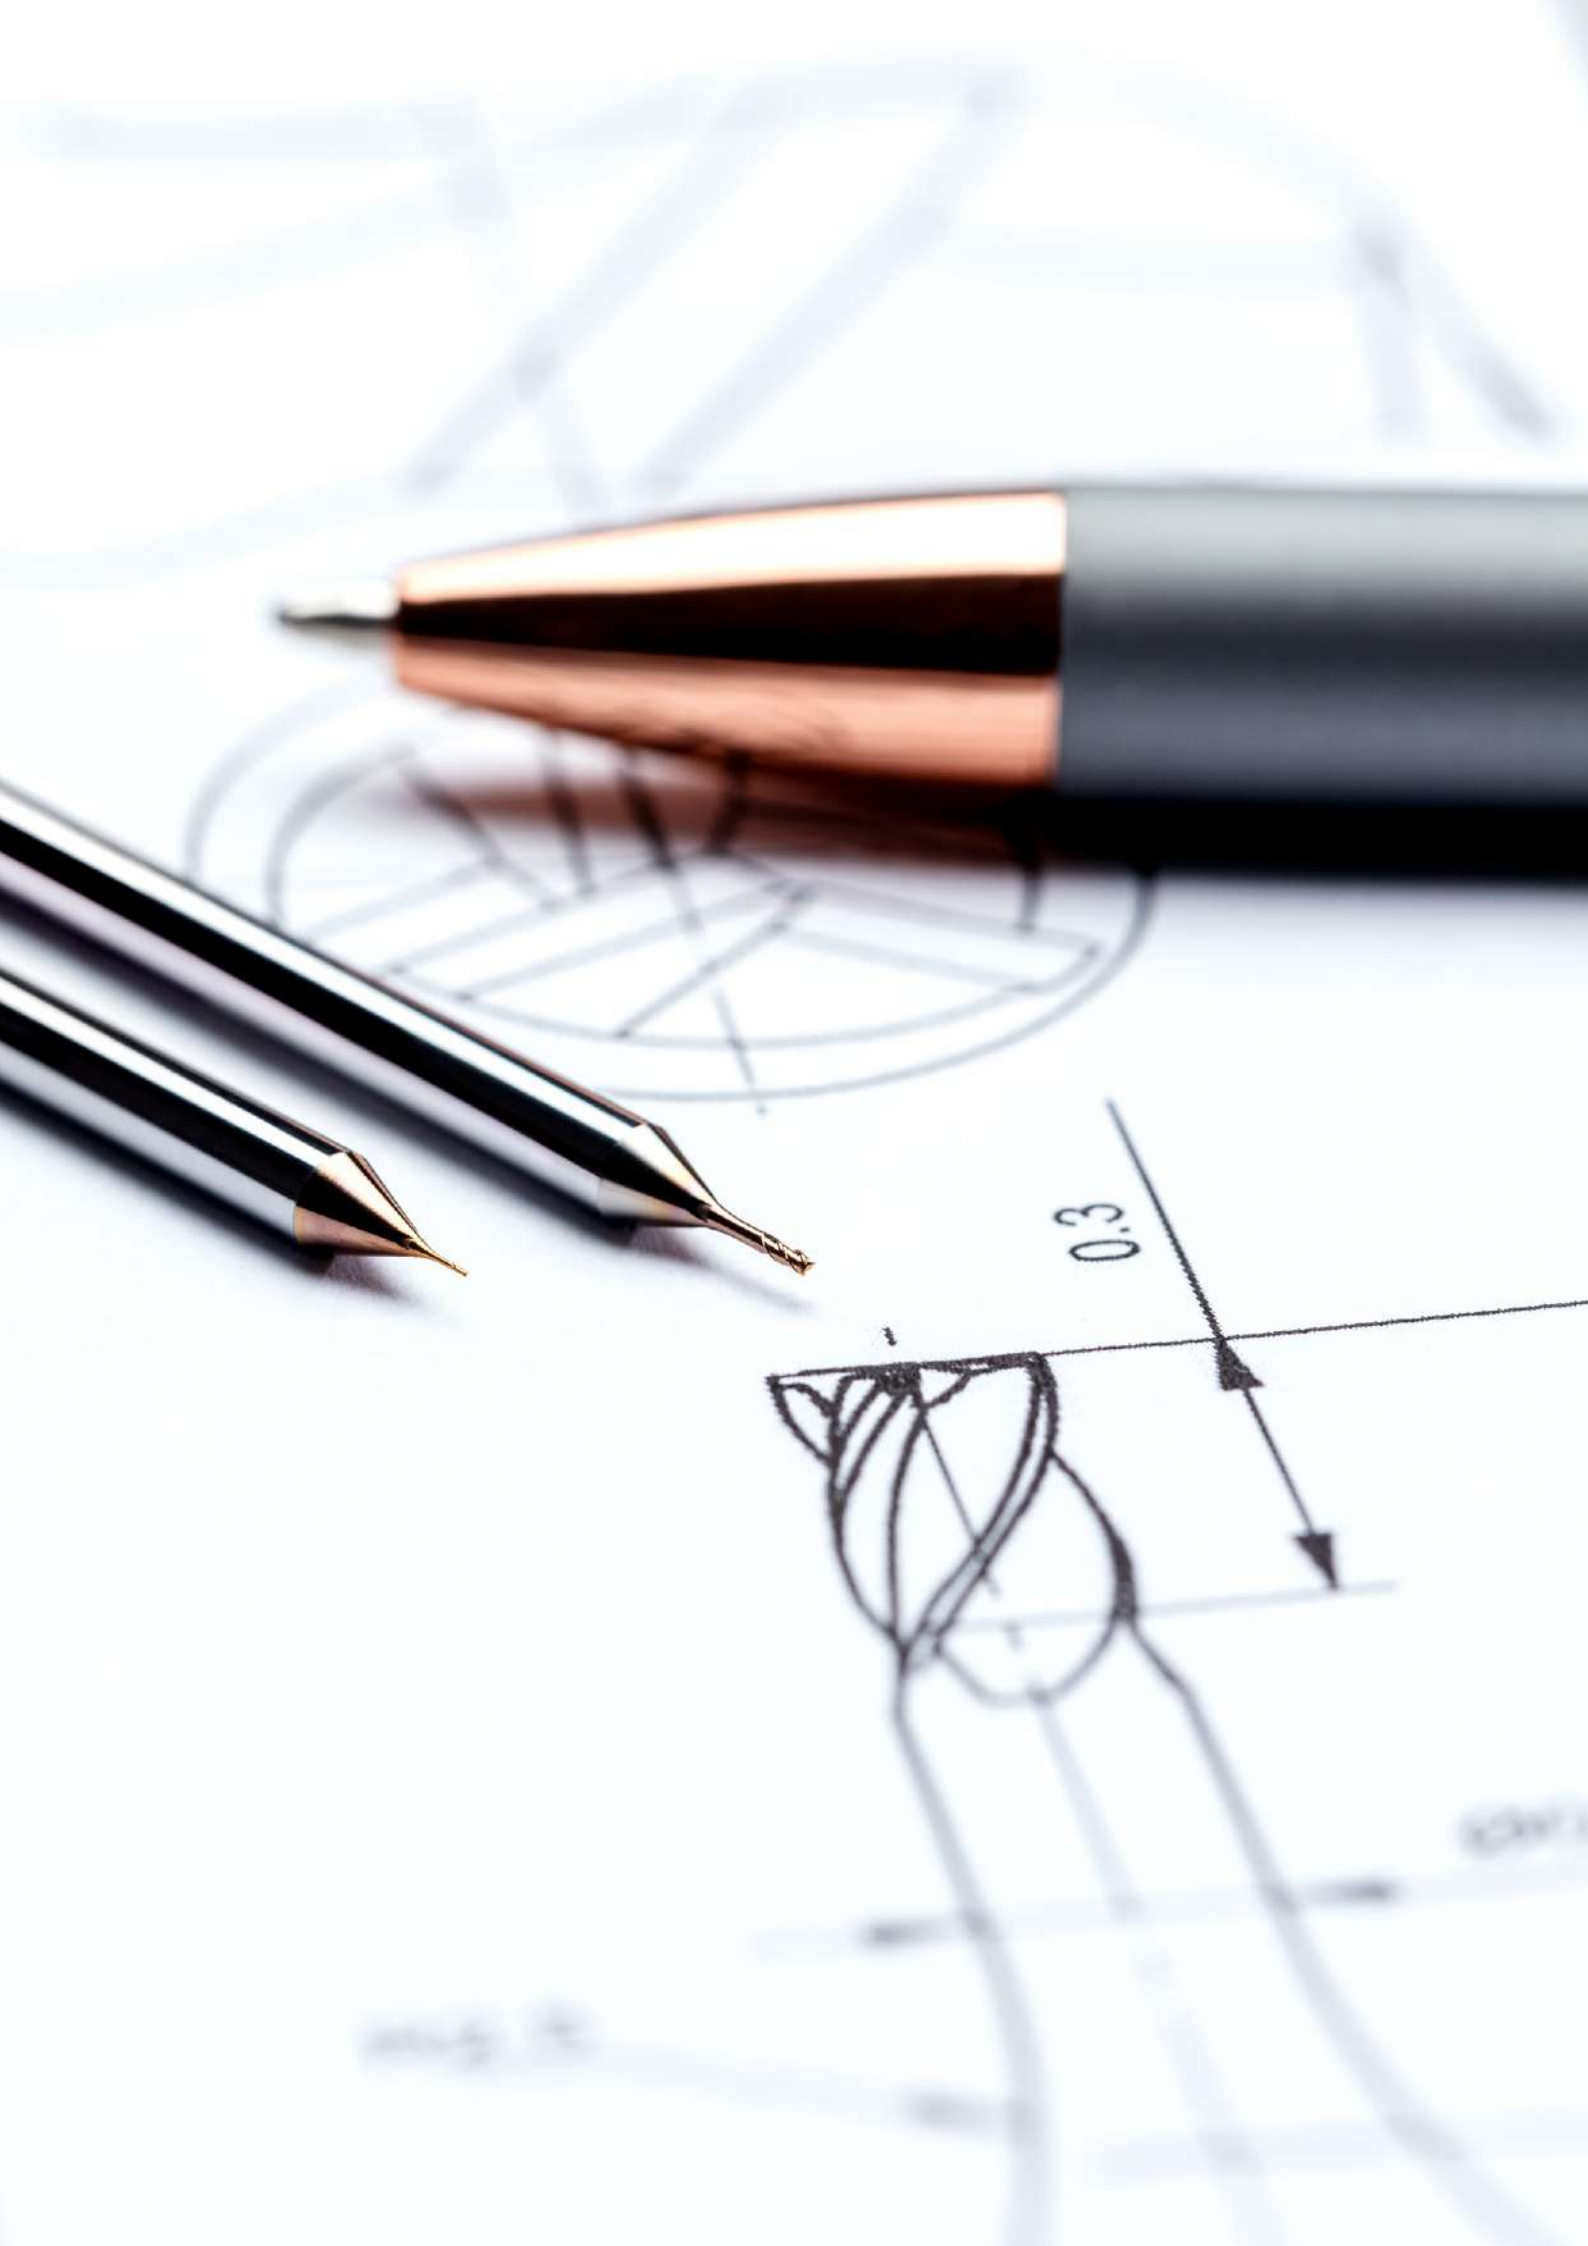

Geometry S					Geometry SX				
Z3					Z4				
Effective length	3 x d	5 x d	3 x d	5 x d	3 x d	5 x d	3 x d	5 x d	
	Type B	Type C	Type B	Type C	Type B	Type C	Type B	Type C	
 Cutting length 1.5 x d									
									
	Diameter range Ø 0.2 - 1.0 mm		Diameter range Ø 0.4 - 1.0 mm		Diameter range Ø 0.2 - 1.0 mm		Diameter range Ø 0.4 - 1.0 mm		
page 16		page 17		page 16		page 17		page 16	

Geometry S: Stainless steels, steels, cast irons, non-ferrous metals, titanium alloys

Geometry SX: Heat-resistant alloys (Inconel, Monel, Nilo, Hastelloy, etc.), CoCr alloys

NEW


Guaranteed maximum performance

COMPARISON OF MICRO-MACHINING EXAMPLES

■ Example 1

Shorter milling time with a thermocouple

Processing: Side milling;
 Milling depth: 1.5 mm;
 Milling width: 0.5 mm;
 Total length: 100 mm;
 Coolant: Cutting oil



CoCr alloy: 2.4964 / CoCr20W15Ni / Haynes 25 **S₃**

Tool: CrazyMill Cool Micro – **Geometry SX**
 Diameter: 0.5 mm

Cutting data:

Conventional micro-endmill				CrazyMill Cool Micro			
$v_c = 60$ m/min	$f_z = 0.006$ mm	$v_c = 60$ m/min	$f_z = 0.005$ mm	$v_c = 60$ m/min	$f_z = 0.005$ mm	$v_c = 60$ m/min	$f_z = 0.005$ mm
$a_p = 0.04$ mm	$a_e = 0.03$ mm	$a_p = 0.50$ mm	$a_e = 0.10$ mm	$a_p = 0.50$ mm	$a_e = 0.10$ mm	$a_p = 0.50$ mm	$a_e = 0.10$ mm

Results:

	Material removal rate	Time
Conventional micro-endmill	11 mm³/min	4 min 30 sec
CrazyMill Cool Micro	28.6 mm³/min	1 min 35 sec


3 x

The unique SX cutting geometry of the CrazyMill Cool Micro is perfect for machining CoCr and heat-resistant alloys. It significantly reduces machining time compared to conventional milling tools.

■ Example 2

Longer tool life when milling a support

Processing: Side milling;
Milling depth: 1.25 mm;
Milling width: 1 mm;
Total length: 60 mm;
Coolant: Cutting oil




Titanium alloy: 3.7165 / TiAl6V4 / ASTM B348 **S₂**

Tool: CrazyMill Cool Micro – **Geometry S**
Diameter: 0.5 mm

Cutting data:

Conventional micro-endmill		CrazyMill Cool Micro	
$v_c = 40 \text{ m/min}$	$f_z = 0.008 \text{ mm}$	$v_c = 60 \text{ m/min}$	$f_z = 0.01 \text{ mm}$
$a_p = 0.04 \text{ mm}$	$a_e = 0.08 \text{ mm}$	$a_p = 0.50 \text{ mm}$	$a_e = 0.10 \text{ mm}$

Results:

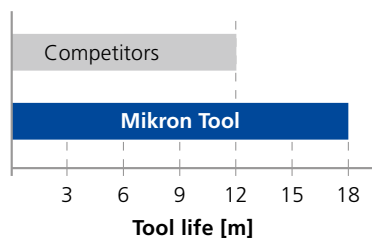


	No. pieces
Conventional micro-endmill	50
CrazyMill Cool Micro	100



NEW

Impressive not only in theory but also in practice

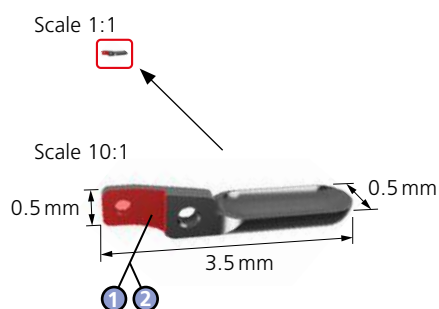SEMI-FINISHING AND FINISHING WITH THROUGH-TOOL COOLING CHANNELS**COMPONENT**

Biopsy tongs

MATERIAL

X20Cr13 / 1.4021 / S42000

PROCESSING


- ① Semi-finishing
- ② Finishing
- Endmill diameter = 0.5 mm
- Width = 0.5 mm
- Depth = 0.75 mm
- Length = 1 mm

MACHINE INFORMATION

- $n_{\max}$: 40,000 rpm
- Pressure: 40 bar
- Through-tool coolant: Cutting oil

TOOL
 Mikron Tool - CrazyMill Cool Micro Square
 Z4 – Type B
DATA**MIKRON TOOL****Tool type**
 CrazyMill Cool Micro Square - Z4
 - Carbide
 - Coated
 - Integrated cooling
Item number

2.CMC35.B1Z4.050.1

Cutting data
 ① Semi-finishing
 $v_c = 60 \text{ m/min}$
 $f_z = 0.013 \text{ mm}$
 $a_{p, \max} = 1.5 \times d$
 $a_e = 0.05 \text{ mm}$
 $Q = 75 \text{ mm}^3/\text{min}$
Time= 3 sec

 ② Finishing
 $v_c = 60 \text{ m/min}$
 $f_z = 0.010 \text{ mm}$
 $a_{p, \max} = 1.5 \times d$
 $a_e = 0.01 \text{ mm}$
 $Q = 15 \text{ mm}^3/\text{min}$
Time= 1 sec

Applications




APPLICATION DOMAINS		COMPONENTS EXAMPLES	MATERIALS GROUPS	EXAMPLES		
				Mat. no.	DIN	AISI / ASTM / UNS
Dental	Dental Bridge	Medical technology	Group P Unalloyed and alloyed steel	1.0401	C15	1015
Medical technology	Component for endoscope			1.3505	100Cr6	52100
Mechanical engineering	Machine components			1.2436	X210CrW12	D4 / D6
Watches	Watch housing	Electronics / Electrics	Group M Stainless steel	1.4105	X6CrMoS17	430F
Electronics / Electrics	Electrical contacts			1.4112	X90CrMoV18	440B
				1.4301	X5CrNi 18-10	304
			Group K Cast iron	0.7040	GGG40	60-40-18
			Group N Non ferrous metals	3.2315	AlMgSi1	6351
				3.2163	GD-AISI9Cu3	A380
				2.004	Cu-OF / CW008A	C10100
				2.0321	CuZn37 CW508L	C27400
				2.102	CuSn6	C51900
				2.096	CuAl9Mn2	C63200
		Group S1 Super alloys	2.4856		INCONEL 625	
			2.4665	NiCr22Fe18Mo	HASTELLOY X	
		Group S2 Titanium (pure and alloyed)	3.7035	Gr.2	B348 / F67	
			3.7165	TiAl6V4	B348 / F136	
		Group S3 CrCo alloys	2.4964	CoCr20W15Ni	HAYNES 25	

NEW

Type B - 3 x d

Carbide

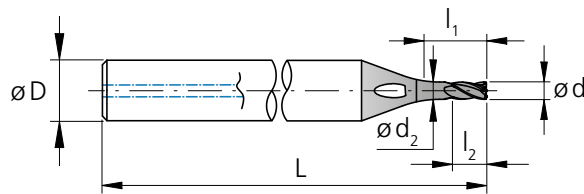**Square**
 $\varnothing d_1$ 0.2 - 1.0 mm

 Tolerance 0
 - 0.01 mm

 l_1 = Effective length
 l_2 = Cutting length
Z3

d_1 [mm]	d_1 [inch]	l_1 [mm]	l_2 [mm]	d_2 [mm]	D (h6) [mm]	L [mm]	Item number	Geometry S	Geometry SX	Availability
0.2		0.60	0.3	0.19	3	38	2.CMC35.B1Z3.020	.1	.C	■
0.3		0.90	0.5	0.28	3	38	2.CMC35.B1Z3.030	.1	.C	■
0.396	1/64	1.19	0.6	0.37	3	38	2.CMC.SB1Z3.F164		.C	■
0.4		1.20	0.6	0.38	3	38	2.CMC35.B1Z3.040	.1	.C	■
0.5		1.50	0.8	0.47	3	38	2.CMC35.B1Z3.050	.1	.C	■
0.6		1.80	0.9	0.56	3	38	2.CMC35.B1Z3.060	.1	.C	■
0.7		2.10	1.1	0.66	3	38	2.CMC35.B1Z3.070	.1	.C	■
0.793	1/32	2.38	1.2	0.75	3	38	2.CMC.SB1Z3.F132		.C	■
0.8		2.40	1.2	0.75	3	38	2.CMC35.B1Z3.080	.1	.C	■
0.9		2.70	1.4	0.85	3	38	2.CMC35.B1Z3.090	.1	.C	■
1.0		3.00	1.5	0.94	4	40	2.CMC35.B1Z3.100	.1	.C	■


Z4

d_1 [mm]	d_1 [inch]	l_1 [mm]	l_2 [mm]	d_2 [mm]	D (h6) [mm]	L [mm]	Item number	Geometry S	Geometry SX	Availability
0.396	1/64	1.19	0.6	0.37	3	38	2.CMC.SB1Z4.F164		.C	■
0.4		1.20	0.6	0.38	3	38	2.CMC35.B1Z4.040	.1	.C	■
0.5		1.50	0.8	0.47	3	38	2.CMC35.B1Z4.050	.1	.C	■
0.6		1.80	0.9	0.56	3	38	2.CMC35.B1Z4.060	.1	.C	■
0.7		2.10	1.1	0.66	3	38	2.CMC35.B1Z4.070	.1	.C	■
0.793	1/32	2.38	1.2	0.75	3	38	2.CMC.SB1Z4.F132		.C	■
0.8		2.40	1.2	0.75	3	38	2.CMC35.B1Z4.080	.1	.C	■
0.9		2.70	1.4	0.85	3	38	2.CMC35.B1Z4.090	.1	.C	■
1.0		3.00	1.5	0.94	4	40	2.CMC35.B1Z4.100	.1	.C	■



■ Stock item

Geometry S: Stainless steels, steels, cast irons, non-ferrous metals, titanium alloys**Geometry SX:** Heat-resistant alloys (Inconel, Monel, Nilo, Hastelloy, etc.), CoCr alloys

Type C - 5 x d



Square

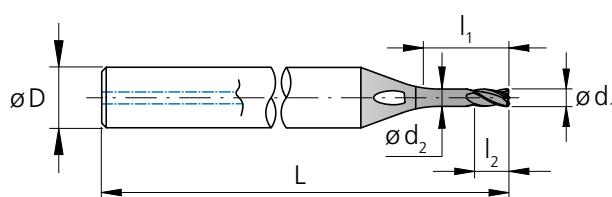

l_1 = Effective length
 l_2 = Cutting length

$\varnothing d_1$	0.2 - 1.0 mm
Tolerance	0 - 0.01 mm

Z3

d_1 [mm]	d_1 [inch]	l_1 [mm]	l_2 [mm]	d_2 [mm]	D (h6) [mm]	L [mm]	Item number	Geometry S	Geometry SX	Availability
0.2		1.00	0.3	0.19	3	38	2.CMC35.C1Z3.020	.1	.C	■
0.3		1.50	0.5	0.28	3	38	2.CMC35.C1Z3.030	.1	.C	■
0.396	1/64	1.98	0.6	0.37	3	38	2.CMC.SC1Z3.F164		.C	■
0.4		2.00	0.6	0.38	3	38	2.CMC35.C1Z3.040	.1	.C	■
0.5		2.50	0.8	0.47	3	38	2.CMC35.C1Z3.050	.1	.C	■
0.6		3.00	0.9	0.56	3	38	2.CMC35.C1Z3.060	.1	.C	■
0.7		3.50	1.1	0.66	3	38	2.CMC35.C1Z3.070	.1	.C	■
0.793	1/32	3.97	1.2	0.75	3	38	2.CMC.SC1Z3.F132		.C	■
0.8		4.00	1.2	0.75	3	38	2.CMC35.C1Z3.080	.1	.C	■
0.9		4.50	1.4	0.85	3	38	2.CMC35.C1Z3.090	.1	.C	■
1.0		5.00	1.5	0.94	4	40	2.CMC35.C1Z3.100	.1	.C	■

Z4

d_1 [mm]	d_1 [inch]	l_1 [mm]	l_2 [mm]	d_2 [mm]	D (h6) [mm]	L [mm]	Item number	Geometry S	Geometry SX	Availability
0.396	1/64	1.98	0.6	0.37	3	38	2.CMC.SC1Z4.F164		.C	■
0.4		2.00	0.6	0.38	3	38	2.CMC35.C1Z4.040	.1	.C	■
0.5		2.50	0.8	0.47	3	38	2.CMC35.C1Z4.050	.1	.C	■
0.6		3.00	0.9	0.56	3	38	2.CMC35.C1Z4.060	.1	.C	■
0.7		3.50	1.1	0.66	3	38	2.CMC35.C1Z4.070	.1	.C	■
0.793	1/32	3.97	1.2	0.75	3	38	2.CMC.SC1Z4.F132		.C	■
0.8		4.00	1.2	0.75	3	38	2.CMC35.C1Z4.080	.1	.C	■
0.9		4.50	1.4	0.85	3	38	2.CMC35.C1Z4.090	.1	.C	■
1.0		5.00	1.5	0.94	4	40	2.CMC35.C1Z4.100	.1	.C	■

■ Stock item

Geometry S: Stainless steels, steels, cast irons, non-ferrous metals, titanium alloys

Geometry SX: Heat-resistant alloys (Inconel, Monel, Nilo, Hastelloy, etc.), CoCr alloys


NEW

Type B - Z3 - Side milling - Roughing


MILLING WITH INTEGRATED COOLING | CUTTING DATA OVERVIEW

Side milling

Roughing





- $a_p = 1 \times d_1$
- $a_e = 0.2 \times d_1$



Note:

In case of helical interpolation milling see α_{max} on page 35



Materials group	Material	Mat. no.	DIN	AISI/ASTM/UNS	Cutting edge geometry	
P	Unalloyed carbon steel $R_m < 800 \text{ N/mm}^2$	1.0301	C10	AISI 1010	GEOMETRY S	
		1.0401	C15	AISI 1015		
		1.1191	C45E/CK45	AISI 1045		
		1.0044	S275JR	AISI 1020		
		1.0715	11SMn30	AISI 1215		
	Low alloyed steel $R_m > 900 \text{ N/mm}^2$	1.5752	15NiCr13	ASTM 3415 / AISI 3310		
		1.7131	16MnCr5	AISI 5115		
		1.3505	100Cr6	AISI 52100		
		1.7225	42CrMo4	AISI 4140		
		1.2842	90MnCrV8	AISI O2		
	High alloyed tool steel $R_m < 1200 \text{ N/mm}^2$	1.2379	X153CrMoV12	AISI D2		
		1.2436	X210CrW12	AISI D4/D6		
		1.3343	HS6-5-2C	AISI M2 / UNS T11302		
		1.3355	HS18-0-1	AISI T1 / UNS T12001		
M	Stainless steel ferritic	1.4016	X6Cr17	AISI 430 / UNS S43000	GEOMETRY S	
		1.4105	X6CrMoS17	AISI 430F		
	Stainless steel martensitic	1.4034	X46Cr13	AISI 420C		
		1.4112	X90CrMoV18	AISI 440B		
	Stainless steel martensitic – PH	1.4542	X5CrNiCuNb16-4	AISI 630 / ASTM 17-4 PH		
		1.4545	X5CrNiCuNb15-5	ASTM 15-5 PH		
	Stainless steel austenitic	1.4301	X5CrNi18-10	AISI 304		
		1.4435	X2CrNiMo18-14-3	AISI 316L		
K	Cast iron	1.4441	X2CrNiMo18-15-3	AISI 316LM		
		1.4539	X1NiCrMoCu25-20-5	AISI 904L		
		0.6020	GG20	ASTM 30	GEOMETRY S	
		0.6030	GG30	ASTM 40B		
		0.7040	GGG40	ASTM 60-40-18		
N	Aluminium alloy wrought	0.7060	GGG60	ASTM 80-60-03		
		3.2315	AlMgSi1	ASTM 6351	GEOMETRY S	
	Aluminium alloy cast	3.4365	AlZnMgCu1.5	ASTM 7075		
		3.2163	GD-AlSi9Cu3	ASTM A380		
	Copper	3.2381	GD-AlSi10Mg	UNS A03590		
		2.0040	Cu-OF / CW008A	UNS C10100		
	Brass lead free	2.0065	Cu-ETP / CW004A	UNS C11000		
		2.0321	CuZn37 CW508L	UNS C27400		
	Brass, Bronze $R_m < 400 \text{ N/mm}^2$	2.0360	CuZn40 CW509L	UNS C28000		
		2.0401	CuZn39Pb3 / CW614N	UNS C38500		
	Bronze $R_m < 600 \text{ N/mm}^2$	2.1020	CuSn6	UNS C51900		
		2.0966	CuAl10Ni5Fe4	UNS C63000		
S₁	Super alloys	2.0960	CuAl9Mn2	UNS C63200		
		2.4856		Inconel 625	GEOMETRY SX	
		2.4668		Inconel 718		
		2.4617	NiMo28	Hastelloy B-2		
		2.4665	NiCr22Fe18Mo	Hastelloy X		
S₂	Titanium pure	3.7035	Gr.2	ASTM B348 / F67	GEOMETRY S	
		3.7065	Gr.4	ASTM B348 / F68		
	Titanium alloys	3.7165	TiAl6V4	ASTM B348 / F136	GEOMETRY S	
		9.9367	TiAl6Nb7	ASTM F1295		
S₃	CoCr alloys	2.4964	CoCr20W15Ni	Haynes 25	GEOMETRY SX	
			CrCoMo28	ASTM F1537		
H₁	Hardened steel $< 55 \text{ HRC}$	1.2510	100MnCrMoW4	AISI O1		
H₂	Hardened steel $\geq 55 \text{ HRC}$	1.2379	X153CrMoV12	AISI D2		

v_c [m/min]
 f_z [mm]

RECOMMENDATION FOR USE

● Excellent | ● Good | ○ Acceptable | ⊗ Not recommended

P	N	S ₃	
M	S ₁	H ₁	
K	S ₂	H ₂	




		0.2 mm		0.3 mm		0.4 mm 1/64"		0.5 mm		0.6 mm		0.7 mm		0.8 mm 1/32"		0.9 - 1.0 mm		
		v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	
		15 - 25	0.003	20 - 40	0.005	25 - 50	0.007	30 - 65	0.010	40 - 75	0.012	45 - 90	0.014	50 - 100	0.016	55 - 115	0.018	
		15 - 25	0.003	20 - 40	0.005	25 - 50	0.007	30 - 65	0.010	40 - 75	0.012	45 - 90	0.014	50 - 100	0.016	55 - 115	0.018	
		15 - 25	0.002	20 - 40	0.004	25 - 50	0.006	30 - 65	0.008	40 - 75	0.009	45 - 90	0.011	50 - 100	0.013	55 - 115	0.015	
		15 - 25	0.003	20 - 40	0.005	25 - 50	0.007	30 - 65	0.010	40 - 75	0.012	45 - 90	0.014	50 - 100	0.016	55 - 115	0.018	
		15 - 25	0.003	20 - 40	0.005	25 - 50	0.007	30 - 65	0.010	40 - 75	0.012	45 - 90	0.014	50 - 100	0.016	55 - 115	0.018	
		15 - 25	0.002	20 - 40	0.004	25 - 50	0.006	30 - 65	0.008	40 - 75	0.009	45 - 90	0.011	50 - 100	0.013	55 - 115	0.015	
		15 - 25	0.002	20 - 40	0.004	25 - 50	0.006	30 - 65	0.008	40 - 75	0.009	45 - 90	0.011	50 - 100	0.013	55 - 115	0.015	
		15 - 25	0.002	20 - 40	0.004	25 - 50	0.006	30 - 65	0.008	40 - 75	0.009	45 - 90	0.011	50 - 100	0.013	55 - 115	0.015	
		15 - 25	0.004	20 - 40	0.007	25 - 50	0.009	30 - 65	0.012	40 - 75	0.013	45 - 90	0.015	50 - 100	0.016	55 - 115	0.017	
		15 - 25	0.004	20 - 40	0.007	25 - 50	0.009	30 - 65	0.012	40 - 75	0.013	45 - 90	0.015	50 - 100	0.016	55 - 115	0.017	
		15 - 25	0.004	20 - 40	0.007	25 - 50	0.009	30 - 65	0.012	40 - 75	0.013	45 - 90	0.015	50 - 100	0.016	55 - 115	0.017	
		15 - 25	0.004	20 - 40	0.007	25 - 50	0.009	30 - 65	0.012	40 - 75	0.013	45 - 90	0.015	50 - 100	0.016	55 - 115	0.017	
		15 - 25	0.004	20 - 40	0.007	25 - 50	0.009	30 - 65	0.012	40 - 75	0.013	45 - 90	0.015	50 - 100	0.016	55 - 115	0.017	
		15 - 25	0.004	20 - 40	0.007	25 - 50	0.009	30 - 65	0.012	40 - 75	0.013	45 - 90	0.015	50 - 100	0.016	55 - 115	0.017	
		15 - 25	0.002	20 - 40	0.003	25 - 50	0.004	30 - 65	0.005	40 - 75	0.007	45 - 90	0.008	50 - 100	0.009	55 - 115	0.010	
		15 - 25	0.002	20 - 40	0.004	25 - 50	0.006	30 - 65	0.008	40 - 75	0.009	45 - 90	0.011	50 - 100	0.013	55 - 115	0.015	
		15 - 25	0.003	20 - 40	0.005	25 - 50	0.007	30 - 65	0.010	40 - 75	0.012	45 - 90	0.014	50 - 100	0.016	55 - 115	0.018	
		15 - 25	0.002	20 - 40	0.003	25 - 50	0.004	30 - 65	0.005	40 - 75	0.007	45 - 90	0.008	50 - 100	0.009	55 - 115	0.010	

NEW

Type B - Z3 - Slot milling

MILLING WITH INTEGRATED COOLING | CUTTING DATA OVERVIEW

Slot milling



Materials group	Material	Mat. no.	DIN	AISI/ASTM/UNS	Cutting edge geometry	
P	Unalloyed carbon steel $R_m < 800 \text{ N/mm}^2$	1.0301	C10	AISI 1010	GEOMETRY S	
		1.0401	C15	AISI 1015		
		1.1191	C45E/CK45	AISI 1045		
		1.0044	S275JR	AISI 1020		
		1.0715	11SMn30	AISI 1215		
	Low alloyed steel $R_m > 900 \text{ N/mm}^2$	1.5752	15NiCr13	ASTM 3415 / AISI 3310		
		1.7131	16MnCr5	AISI 5115		
		1.3505	100Cr6	AISI 52100		
		1.7225	42CrMo4	AISI 4140		
		1.2842	90MnCrV8	AISI O2		
	High alloyed tool steel $R_m < 1200 \text{ N/mm}^2$	1.2379	X153CrMoV12	AISI D2		
		1.2436	X210CrW12	AISI D4/D6		
		1.3343	HS6-5-2C	AISI M2 / UNS T11302		
		1.3355	HS18-0-1	AISI T1 / UNS T12001		
M	Stainless steel ferritic	1.4016	X6Cr17	AISI 430 / UNS S43000	GEOMETRY S	
		1.4105	X6CrMoS17	AISI 430F		
	Stainless steel martensitic	1.4034	X46Cr13	AISI 420C		
		1.4112	X90CrMoV18	AISI 440B		
	Stainless steel martensitic – PH	1.4542	X5CrNiCuNb16-4	AISI 630 / ASTM 17-4 PH		
		1.4545	X5CrNiCuNb15-5	ASTM 15-5 PH		
	Stainless steel austenitic	1.4301	X5CrNi18-10	AISI 304		
		1.4435	X2CrNiMo18-14-3	AISI 316L		
K	Cast iron	1.4441	X2CrNiMo18-15-3	AISI 316LM		
		1.4539	X1NiCrMoCu25-20-5	AISI 904L		
		0.6020	GG20	ASTM 30	GEOMETRY S	
		0.6030	GG30	ASTM 40B		
		0.7040	GGG40	ASTM 60-40-18		
N	Aluminium alloy wrought	0.7060	GGG60	ASTM 80-60-03		
		3.2315	AlMgSi1	ASTM 6351	GEOMETRY S	
	Aluminium alloy cast	3.4365	AlZnMgCu1.5	ASTM 7075		
		3.2163	GD-AlSi9Cu3	ASTM A380		
	Copper	3.2381	GD-AlSi10Mg	UNS A03590		
		2.0040	Cu-OF / CW008A	UNS C10100		
	Brass lead free	2.0065	Cu-ETP / CW004A	UNS C11000		
		2.0321	CuZn37 CW508L	UNS C27400		
	Brass, Bronze $R_m < 400 \text{ N/mm}^2$	2.0360	CuZn40 CW509L	UNS C28000		
		2.0401	CuZn39Pb3 / CW614N	UNS C38500		
	Bronze $R_m < 600 \text{ N/mm}^2$	2.1020	CuSn6	UNS C51900		
		2.0966	CuAl10Ni5Fe4	UNS C63000		
		2.0960	CuAl9Mn2	UNS C63200		
S₁	Super alloys	2.4856		Inconel 625	GEOMETRY SX	
		2.4668		Inconel 718		
		2.4617	NiMo28	Hastelloy B-2		
		2.4665	NiCr22Fe18Mo	Hastelloy X		
S₂	Titanium pure	3.7035	Gr.2	ASTM B348 / F67	GEOMETRY S	
		3.7065	Gr.4	ASTM B348 / F68		
	Titanium alloys	3.7165	TiAl6V4	ASTM B348 / F136	GEOMETRY S	
		9.9367	TiAl6Nb7	ASTM F1295		
S₃	CoCr alloys	2.4964	CoCr20W15Ni	Haynes 25	GEOMETRY SX	
			CrCoMo28	ASTM F1537		
H₁	Hardened steel $< 55 \text{ HRC}$	1.2510	100MnCrMoW4	AISI O1		
H₂	Hardened steel $\geq 55 \text{ HRC}$	1.2379	X153CrMoV12	AISI D2		

v_c [m/min]
 f_z [mm]

RECOMMENDATION FOR USE

● Excellent | ● Good | ○ Acceptable | ⊗ Not recommended

P	N	S ₃	
M	S ₁	H ₁	
K	S ₂	H ₂	

a_p		0.2 mm		0.3 mm		0.4 mm 1/64"		0.5 mm		0.6 mm		0.7 mm		0.8 mm 1/32"		0.9 - 1.0 mm	
		v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z
0.5 x d_1		15 - 25	0.003	20 - 40	0.005	25 - 50	0.007	30 - 65	0.010	40 - 75	0.012	45 - 90	0.014	50 - 100	0.016	55 - 115	0.018
		15 - 25	0.003	20 - 40	0.005	25 - 50	0.007	30 - 65	0.010	40 - 75	0.012	45 - 90	0.014	50 - 100	0.016	55 - 115	0.018
		15 - 25	0.002	20 - 40	0.004	25 - 50	0.006	30 - 65	0.008	40 - 75	0.009	45 - 90	0.011	50 - 100	0.013	55 - 115	0.015
0.5 x d_1		15 - 25	0.003	20 - 40	0.005	25 - 50	0.007	30 - 65	0.010	40 - 75	0.012	45 - 90	0.014	50 - 100	0.016	55 - 115	0.018
		15 - 25	0.003	20 - 40	0.005	25 - 50	0.007	30 - 65	0.010	40 - 75	0.012	45 - 90	0.014	50 - 100	0.016	55 - 115	0.018
		15 - 25	0.002	20 - 40	0.004	25 - 50	0.006	30 - 65	0.008	40 - 75	0.009	45 - 90	0.011	50 - 100	0.013	55 - 115	0.015
		15 - 25	0.002	20 - 40	0.004	25 - 50	0.006	30 - 65	0.008	40 - 75	0.009	45 - 90	0.011	50 - 100	0.013	55 - 115	0.015
0.5 x d_1		15 - 25	0.002	20 - 40	0.004	25 - 50	0.006	30 - 65	0.008	40 - 75	0.009	45 - 90	0.011	50 - 100	0.013	55 - 115	0.015
0.5 x d_1		15 - 25	0.004	20 - 40	0.007	25 - 50	0.009	30 - 65	0.012	40 - 75	0.013	45 - 90	0.015	50 - 100	0.016	55 - 115	0.017
		15 - 25	0.004	20 - 40	0.007	25 - 50	0.009	30 - 65	0.012	40 - 75	0.013	45 - 90	0.015	50 - 100	0.016	55 - 115	0.017
		15 - 25	0.004	20 - 40	0.007	25 - 50	0.009	30 - 65	0.012	40 - 75	0.013	45 - 90	0.015	50 - 100	0.016	55 - 115	0.017
		15 - 25	0.004	20 - 40	0.007	25 - 50	0.009	30 - 65	0.012	40 - 75	0.013	45 - 90	0.015	50 - 100	0.016	55 - 115	0.017
		15 - 25	0.004	20 - 40	0.007	25 - 50	0.009	30 - 65	0.012	40 - 75	0.013	45 - 90	0.015	50 - 100	0.016	55 - 115	0.017
		15 - 25	0.004	20 - 40	0.007	25 - 50	0.009	30 - 65	0.012	40 - 75	0.013	45 - 90	0.015	50 - 100	0.016	55 - 115	0.017
0.25 x d_1		15 - 25	0.002	20 - 40	0.003	25 - 50	0.004	30 - 65	0.005	40 - 75	0.007	45 - 90	0.008	50 - 100	0.009	55 - 115	0.010
0.5 x d_1		15 - 25	0.002	20 - 40	0.004	25 - 50	0.006	30 - 65	0.008	40 - 75	0.009	45 - 90	0.011	50 - 100	0.013	55 - 115	0.015
0.5 x d_1		15 - 25	0.003	20 - 40	0.005	25 - 50	0.007	30 - 65	0.010	40 - 75	0.012	45 - 90	0.014	50 - 100	0.016	55 - 115	0.018
0.5 x d_1		15 - 25	0.002	20 - 40	0.003	25 - 50	0.004	30 - 65	0.005	40 - 75	0.007	45 - 90	0.008	50 - 100	0.009	55 - 115	0.010


NEW

Type B - Z4 - Side milling - Semi-finishing

MILLING WITH INTEGRATED COOLING | CUTTING DATA OVERVIEW


Side milling

Semi-finishing





$$a_p = 1.5 \times d_1$$

$$a_e = 0.1 \times d_1$$



Note:

In case of helical interpolation milling see α_{max} on page 35



Materials group	Material	Mat. no.	DIN	AISI/ASTM/UNS	Cutting edge geometry	
P	Unalloyed carbon steel Rm < 800 N/mm²	1.0301	C10	AISI 1010	GEOMETRY S	
		1.0401	C15	AISI 1015		
		1.1191	C45E/CK45	AISI 1045		
		1.0044	S275JR	AISI 1020		
		1.0715	11SMn30	AISI 1215		
	Low alloyed steel Rm > 900 N/mm²	1.5752	15NiCr13	ASTM 3415 / AISI 3310		
		1.7131	16MnCr5	AISI 5115		
		1.3505	100Cr6	AISI 52100		
		1.7225	42CrMo4	AISI 4140		
		1.2842	90MnCrV8	AISI O2		
	High alloyed tool steel Rm < 1200 N/mm²	1.2379	X153CrMoV12	AISI D2		
		1.2436	X210CrW12	AISI D4/D6		
		1.3343	HS6-5-2C	AISI M2 / UNS T11302		
1.3355		HS18-0-1	AISI T1 / UNS T12001			
M	Stainless steel ferritic	1.4016	X6Cr17	AISI 430 / UNS S43000	GEOMETRY S	
		1.4105	X6CrMoS17	AISI 430F		
	Stainless steel martensitic	1.4034	X46Cr13	AISI 420C		
		1.4112	X90CrMoV18	AISI 440B		
	Stainless steel martensitic – PH	1.4542	X5CrNiCuNb16-4	AISI 630 / ASTM 17-4 PH		
		1.4545	X5CrNiCuNb15-5	ASTM 15-5 PH		
	Stainless steel austenitic	1.4301	X5CrNi18-10	AISI 304		
		1.4435	X2CrNiMo18-14-3	AISI 316L		
		1.4441	X2CrNiMo18-15-3	AISI 316LM		
1.4539		X1NiCrMoCu25-20-5	AISI 904L			
K	Cast iron	0.6020	GG20	ASTM 30	GEOMETRY S	
		0.6030	GG30	ASTM 40B		
		0.7040	GGG40	ASTM 60-40-18		
		0.7060	GGG60	ASTM 80-60-03		
N	Aluminium alloy wrought	3.2315	AlMgSi1	ASTM 6351	GEOMETRY S	
		3.4365	AlZnMgCu1.5	ASTM 7075		
	Aluminium alloy cast	3.2163	GD-AlSi9Cu3	ASTM A380		
		3.2381	GD-AlSi10Mg	UNS A03590		
	Copper	2.0040	Cu-OF / CW008A	UNS C10100		
		2.0065	Cu-ETP / CW004A	UNS C11000		
	Brass lead free	2.0321	CuZn37 CW508L	UNS C27400		
		2.0360	CuZn40 CW509L	UNS C28000		
	Brass, Bronze Rm < 400 N/mm²	2.0401	CuZn39Pb3 / CW614N	UNS C38500		
		2.1020	CuSn6	UNS C51900		
Bronze Rm < 600 N/mm²	2.0966	CuAl10Ni5Fe4	UNS C63000			
	2.0960	CuAl9Mn2	UNS C63200			
S ₁	Super alloys	2.4856		Inconel 625	GEOMETRY SX	
		2.4668		Inconel 718		
		2.4617	NiMo28	Hastelloy B-2		
		2.4665	NiCr22Fe18Mo	Hastelloy X		
S ₂	Titanium pure	3.7035	Gr.2	ASTM B348 / F67	GEOMETRY S	
		3.7065	Gr.4	ASTM B348 / F68		
	Titanium alloys	3.7165	TiAl6V4	ASTM B348 / F136	GEOMETRY S	
		9.9367	TiAl6Nb7	ASTM F1295		
S ₃	CoCr alloys	2.4964	CoCr20W15Ni	Haynes 25	GEOMETRY SX	
			CrCoMo28	ASTM F1537		
H ₁	Hardened steel < 55 HRC	1.2510	100MnCrMoW4	AISI O1		
H ₂	Hardened steel ≥ 55 HRC	1.2379	X153CrMoV12	AISI D2		

v_c [m/min]
 f_z [mm]

RECOMMENDATION FOR USE

● Excellent | ● Good | ○ Acceptable | ⊗ Not recommended


P	N	S ₃
M	S ₁	H ₁
K	S ₂	H ₂

Ød ₁												
0.4 mm 1/64"		0.5 mm		0.6 mm		0.7 mm		0.8 mm 1/32"		0.9 - 1.0 mm		
v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	
45 - 75	0.011	55 - 95	0.013	65 - 115	0.015	75 - 130	0.018	90 - 150	0.020	100 - 170	0.022	
45 - 75	0.011	55 - 95	0.013	65 - 115	0.015	75 - 130	0.018	90 - 150	0.020	100 - 170	0.022	
45 - 75	0.008	55 - 95	0.010	65 - 115	0.012	75 - 130	0.014	90 - 150	0.016	100 - 170	0.018	
45 - 75	0.010	55 - 95	0.013	65 - 115	0.015	75 - 130	0.018	90 - 150	0.020	100 - 170	0.022	
45 - 75	0.010	55 - 95	0.013	65 - 115	0.015	75 - 130	0.018	90 - 150	0.020	100 - 170	0.022	
45 - 75	0.010	55 - 95	0.013	65 - 115	0.015	75 - 130	0.018	90 - 150	0.020	100 - 170	0.022	
45 - 75	0.007	55 - 95	0.010	65 - 115	0.012	75 - 130	0.014	90 - 150	0.016	100 - 170	0.018	
45 - 75	0.011	55 - 95	0.013	65 - 115	0.015	75 - 130	0.018	90 - 150	0.020	100 - 170	0.022	
45 - 75	0.012	55 - 95	0.013	65 - 115	0.015	75 - 130	0.016	90 - 150	0.017	100 - 170	0.018	
45 - 75	0.012	55 - 95	0.013	65 - 115	0.015	75 - 130	0.016	90 - 150	0.017	100 - 170	0.018	
45 - 75	0.012	55 - 95	0.013	65 - 115	0.015	75 - 130	0.016	90 - 150	0.017	100 - 170	0.018	
45 - 75	0.012	55 - 95	0.013	65 - 115	0.015	75 - 130	0.016	90 - 150	0.017	100 - 170	0.018	
45 - 75	0.012	55 - 95	0.013	65 - 115	0.015	75 - 130	0.016	90 - 150	0.017	100 - 170	0.018	
45 - 75	0.012	55 - 95	0.013	65 - 115	0.015	75 - 130	0.016	90 - 150	0.017	100 - 170	0.018	
45 - 75	0.005	55 - 95	0.007	65 - 115	0.008	75 - 130	0.009	90 - 150	0.010	100 - 170	0.011	
45 - 75	0.007	55 - 95	0.010	65 - 115	0.012	75 - 130	0.014	90 - 150	0.016	100 - 170	0.018	
45 - 75	0.007	55 - 95	0.010	65 - 115	0.012	75 - 130	0.014	90 - 150	0.016	100 - 170	0.018	
45 - 75	0.005	55 - 95	0.007	65 - 115	0.008	75 - 130	0.009	90 - 150	0.010	100 - 170	0.011	

NEW


Type B - Z4 - Side milling - Finishing

MILLING WITH INTEGRATED COOLING | CUTTING DATA OVERVIEW



Side milling**Finishing**

$$a_p = 1.5 \times d_1$$

$$a_e = 0.02 \times d_1$$

**Note:**

In case of helical interpolation milling
see α_{max} on page 35



Materials group	Material	Mat. no.	DIN	AISI/ASTM/UNS	Cutting edge geometry	
P	Unalloyed carbon steel $R_m < 800 \text{ N/mm}^2$	1.0301	C10	AISI 1010	GEOMETRY S	
		1.0401	C15	AISI 1015		
		1.1191	C45E/CK45	AISI 1045		
		1.0044	S275JR	AISI 1020		
		1.0715	11SMn30	AISI 1215		
	Low alloyed steel $R_m > 900 \text{ N/mm}^2$	1.5752	15NiCr13	ASTM 3415 / AISI 3310		
		1.7131	16MnCr5	AISI 5115		
		1.3505	100Cr6	AISI 52100		
		1.7225	42CrMo4	AISI 4140		
		1.2842	90MnCrV8	AISI O2		
	High alloyed tool steel $R_m < 1200 \text{ N/mm}^2$	1.2379	X153CrMoV12	AISI D2		
		1.2436	X210CrW12	AISI D4/D6		
		1.3343	HS6-5-2C	AISI M2 / UNS T11302		
		1.3355	HS18-0-1	AISI T1 / UNS T12001		
M	Stainless steel ferritic	1.4016	X6Cr17	AISI 430 / UNS S43000	GEOMETRY S	
		1.4105	X6CrMoS17	AISI 430F		
	Stainless steel martensitic	1.4034	X46Cr13	AISI 420C		
		1.4112	X90CrMoV18	AISI 440B		
	Stainless steel martensitic – PH	1.4542	X5CrNiCuNb16-4	AISI 630 / ASTM 17-4 PH		
		1.4545	X5CrNiCuNb15-5	ASTM 15-5 PH		
	Stainless steel austenitic	1.4301	X5CrNi18-10	AISI 304		
		1.4435	X2CrNiMo18-14-3	AISI 316L		
K	Cast iron	1.4441	X2CrNiMo18-15-3	AISI 316LM	GEOMETRY S	
		1.4539	X1NiCrMoCu25-20-5	AISI 904L		
		0.6020	GG20	ASTM 30		
		0.6030	GG30	ASTM 40B		
		0.7040	GGG40	ASTM 60-40-18		
N	Aluminium alloy wrought	0.7060	GGG60	ASTM 80-60-03	GEOMETRY S	
		3.2315	AlMgSi1	ASTM 6351		
	Aluminium alloy cast	3.4365	AlZnMgCu1.5	ASTM 7075		
		3.2163	GD-AlSi9Cu3	ASTM A380		
	Copper	3.2381	GD-AlSi10Mg	UNS A03590		
		2.0040	Cu-OF / CW008A	UNS C10100		
	Brass lead free	2.0065	Cu-ETP / CW004A	UNS C11000		
		2.0321	CuZn37 CW508L	UNS C27400		
	Brass, Bronze $R_m < 400 \text{ N/mm}^2$	2.0360	CuZn40 CW509L	UNS C28000		
		2.0401	CuZn39Pb3 / CW614N	UNS C38500		
	Bronze $R_m < 600 \text{ N/mm}^2$	2.1020	CuSn6	UNS C51900		
S₁	Super alloys	2.0966	CuAl10Ni5Fe4	UNS C63000	GEOMETRY SX	
		2.0960	CuAl9Mn2	UNS C63200		
		2.4856		Inconel 625		
		2.4668		Inconel 718		
S₂	Titanium pure	2.4617	NiMo28	Hastelloy B-2	GEOMETRY S	
		2.4665	NiCr22Fe18Mo	Hastelloy X		
	Titanium alloys	3.7035	Gr.2	ASTM B348 / F67	GEOMETRY S	
		3.7065	Gr.4	ASTM B348 / F68		
S₃	CoCr alloys	3.7165	TiAl6V4	ASTM B348 / F136	GEOMETRY SX	
		9.9367	TiAl6Nb7	ASTM F1295		
		2.4964	CoCr20W15Ni	Haynes 25		
H₁ H₂	Hardened steel $< 55 \text{ HRC}$	CrCoMo28	ASTM F1537			
	Hardened steel $\geq 55 \text{ HRC}$	1.2510	100MnCrMoW4	AISI O1		
		1.2379	X153CrMoV12	AISI D2		

v_c [m/min]
 f_z [mm]

RECOMMENDATION FOR USE

● Excellent | ● Good | ○ Acceptable | ⊗ Not recommended

P	N	S ₃
M	S ₁	H ₁
K	S ₂	H ₂

Ød ₁												
0.4 mm 1/64"		0.5 mm		0.6 mm		0.7 mm		0.8 mm 1/32"		0.9 - 1.0 mm		
v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	
45 - 75	0.009	55 - 95	0.010	65 - 115	0.012	75 - 130	0.014	90 - 150	0.016	100 - 170	0.018	
45 - 75	0.009	55 - 95	0.010	65 - 115	0.012	75 - 130	0.014	90 - 150	0.016	100 - 170	0.018	
45 - 75	0.006	55 - 95	0.008	65 - 115	0.010	75 - 130	0.011	90 - 150	0.013	100 - 170	0.014	
45 - 75	0.008	55 - 95	0.010	65 - 115	0.012	75 - 130	0.014	90 - 150	0.016	100 - 170	0.018	
45 - 75	0.008	55 - 95	0.010	65 - 115	0.012	75 - 130	0.014	90 - 150	0.016	100 - 170	0.018	
45 - 75	0.008	55 - 95	0.010	65 - 115	0.012	75 - 130	0.014	90 - 150	0.016	100 - 170	0.018	
45 - 75	0.006	55 - 95	0.008	65 - 115	0.010	75 - 130	0.011	90 - 150	0.013	100 - 170	0.014	
45 - 75	0.009	55 - 95	0.010	65 - 115	0.012	75 - 130	0.014	90 - 150	0.016	100 - 170	0.018	
45 - 75	0.010	55 - 95	0.010	65 - 115	0.012	75 - 130	0.013	90 - 150	0.014	100 - 170	0.014	
45 - 75	0.010	55 - 95	0.010	65 - 115	0.012	75 - 130	0.013	90 - 150	0.014	100 - 170	0.014	
45 - 75	0.010	55 - 95	0.010	65 - 115	0.012	75 - 130	0.013	90 - 150	0.014	100 - 170	0.014	
45 - 75	0.010	55 - 95	0.010	65 - 115	0.012	75 - 130	0.013	90 - 150	0.014	100 - 170	0.014	
45 - 75	0.010	55 - 95	0.010	65 - 115	0.012	75 - 130	0.013	90 - 150	0.014	100 - 170	0.014	
45 - 75	0.010	55 - 95	0.010	65 - 115	0.012	75 - 130	0.013	90 - 150	0.014	100 - 170	0.014	
45 - 75	0.004	55 - 95	0.006	65 - 115	0.006	75 - 130	0.007	90 - 150	0.008	100 - 170	0.009	
45 - 75	0.006	55 - 95	0.008	65 - 115	0.010	75 - 130	0.011	90 - 150	0.013	100 - 170	0.014	
45 - 75	0.006	55 - 95	0.008	65 - 115	0.010	75 - 130	0.011	90 - 150	0.013	100 - 170	0.014	
45 - 75	0.004	55 - 95	0.006	65 - 115	0.006	75 - 130	0.007	90 - 150	0.008	100 - 170	0.009	


NEW

Type C - Z3 - Side milling - Roughing


MILLING WITH INTEGRATED COOLING | CUTTING DATA OVERVIEW

Side milling



Roughing



- $a_p = 1 \times d_1$
- $a_e = 0.1 \times d_1$

**Note:**

In case of helical interpolation milling
see α_{max} on page 35



Materials group	Material	Mat. no.	DIN	AISI/ASTM/UNS	Cutting edge geometry	
P	Unalloyed carbon steel $R_m < 800 \text{ N/mm}^2$	1.0301	C10	AISI 1010	GEOMETRY S	
		1.0401	C15	AISI 1015		
		1.1191	C45E/CK45	AISI 1045		
		1.0044	S275JR	AISI 1020		
		1.0715	11SMn30	AISI 1215		
	Low alloyed steel $R_m > 900 \text{ N/mm}^2$	1.5752	15NiCr13	ASTM 3415 / AISI 3310		
		1.7131	16MnCr5	AISI 5115		
		1.3505	100Cr6	AISI 52100		
		1.7225	42CrMo4	AISI 4140		
		1.2842	90MnCrV8	AISI O2		
	High alloyed tool steel $R_m < 1200 \text{ N/mm}^2$	1.2379	X153CrMoV12	AISI D2		
		1.2436	X210CrW12	AISI D4/D6		
		1.3343	HS6-5-2C	AISI M2 / UNS T11302		
		1.3355	HS18-0-1	AISI T1 / UNS T12001		
M	Stainless steel ferritic	1.4016	X6Cr17	AISI 430 / UNS S43000	GEOMETRY S	
		1.4105	X6CrMoS17	AISI 430F		
	Stainless steel martensitic	1.4034	X46Cr13	AISI 420C		
		1.4112	X90CrMoV18	AISI 440B		
	Stainless steel martensitic – PH	1.4542	X5CrNiCuNb16-4	AISI 630 / ASTM 17-4 PH		
		1.4545	X5CrNiCuNb15-5	ASTM 15-5 PH		
	Stainless steel austenitic	1.4301	X5CrNi18-10	AISI 304		
		1.4435	X2CrNiMo18-14-3	AISI 316L		
K	Cast iron	1.4441	X2CrNiMo18-15-3	AISI 316LM		
		1.4539	X1NiCrMoCu25-20-5	AISI 904L		
		0.6020	GG20	ASTM 30	GEOMETRY S	
		0.6030	GG30	ASTM 40B		
		0.7040	GGG40	ASTM 60-40-18		
N	Aluminium alloy wrought	0.7060	GGG60	ASTM 80-60-03		
		3.2315	AlMgSi1	ASTM 6351	GEOMETRY S	
	Aluminium alloy cast	3.4365	AlZnMgCu1.5	ASTM 7075		
		3.2163	GD-AlSi9Cu3	ASTM A380		
	Copper	3.2381	GD-AlSi10Mg	UNS A03590		
		2.0040	Cu-OF / CW008A	UNS C10100		
	Brass lead free	2.0065	Cu-ETP / CW004A	UNS C11000		
		2.0321	CuZn37 CW508L	UNS C27400		
	Brass, Bronze $R_m < 400 \text{ N/mm}^2$	2.0360	CuZn40 CW509L	UNS C28000		
		2.0401	CuZn39Pb3 / CW614N	UNS C38500		
	Bronze $R_m < 600 \text{ N/mm}^2$	2.1020	CuSn6	UNS C51900		
		2.0966	CuAl10Ni5Fe4	UNS C63000		
		2.0960	CuAl9Mn2	UNS C63200		
S₁	Super alloys	2.4856		Inconel 625	GEOMETRY SX	
		2.4668		Inconel 718		
		2.4617	NiMo28	Hastelloy B-2		
		2.4665	NiCr22Fe18Mo	Hastelloy X		
S₂	Titanium pure	3.7035	Gr.2	ASTM B348 / F67	GEOMETRY S	
		3.7065	Gr.4	ASTM B348 / F68		
	Titanium alloys	3.7165	TiAl6V4	ASTM B348 / F136	GEOMETRY S	
		9.9367	TiAl6Nb7	ASTM F1295		
S₃	CoCr alloys	2.4964	CoCr20W15Ni	Haynes 25	GEOMETRY SX	
			CrCoMo28	ASTM F1537		
H₁	Hardened steel $< 55 \text{ HRC}$	1.2510	100MnCrMoW4	AISI O1		
H₂	Hardened steel $\geq 55 \text{ HRC}$	1.2379	X153CrMoV12	AISI D2		

v_c [m/min]
 f_z [mm]

RECOMMENDATION FOR USE

● Excellent | ● Good | ○ Acceptable | ⊗ Not recommended

P	N	S ₃	
M	S ₁	H ₁	
K	S ₂	H ₂	




	0.2 mm		0.3 mm		0.4 mm 1/64"		0.5 mm		0.6 mm		0.7 mm		0.8 mm 1/32"		0.9 - 1.0 mm		
	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	
	15 - 25	0.004	20 - 40	0.006	25 - 50	0.010	30 - 65	0.012	40 - 75	0.014	45 - 90	0.017	50 - 100	0.019	55 - 115	0.021	
	15 - 25	0.004	20 - 40	0.006	25 - 50	0.010	30 - 65	0.012	40 - 75	0.014	45 - 90	0.017	50 - 100	0.019	55 - 115	0.021	
	15 - 25	0.003	20 - 40	0.005	25 - 50	0.007	30 - 65	0.009	40 - 75	0.011	45 - 90	0.013	50 - 100	0.015	55 - 115	0.017	
	15 - 25	0.004	20 - 40	0.006	25 - 50	0.010	30 - 65	0.012	40 - 75	0.014	45 - 90	0.017	50 - 100	0.019	55 - 115	0.021	
	15 - 25	0.004	20 - 40	0.006	25 - 50	0.010	30 - 65	0.012	40 - 75	0.014	45 - 90	0.017	50 - 100	0.019	55 - 115	0.021	
	15 - 25	0.003	20 - 40	0.005	25 - 50	0.007	30 - 65	0.009	40 - 75	0.011	45 - 90	0.013	50 - 100	0.015	55 - 115	0.017	
	15 - 25	0.003	20 - 40	0.005	25 - 50	0.007	30 - 65	0.009	40 - 75	0.011	45 - 90	0.013	50 - 100	0.015	55 - 115	0.017	
	15 - 25	0.003	20 - 40	0.005	25 - 50	0.007	30 - 65	0.009	40 - 75	0.011	45 - 90	0.013	50 - 100	0.015	55 - 115	0.017	
	15 - 25	0.006	20 - 40	0.008	25 - 50	0.011	30 - 65	0.016	40 - 75	0.018	45 - 90	0.019	50 - 100	0.021	55 - 115	0.022	
	15 - 25	0.006	20 - 40	0.008	25 - 50	0.011	30 - 65	0.016	40 - 75	0.018	45 - 90	0.019	50 - 100	0.021	55 - 115	0.022	
	15 - 25	0.006	20 - 40	0.008	25 - 50	0.011	30 - 65	0.016	40 - 75	0.018	45 - 90	0.019	50 - 100	0.021	55 - 115	0.022	
	15 - 25	0.006	20 - 40	0.008	25 - 50	0.011	30 - 65	0.016	40 - 75	0.018	45 - 90	0.019	50 - 100	0.021	55 - 115	0.022	
	15 - 25	0.006	20 - 40	0.008	25 - 50	0.011	30 - 65	0.016	40 - 75	0.018	45 - 90	0.019	50 - 100	0.021	55 - 115	0.022	
	15 - 25	0.006	20 - 40	0.008	25 - 50	0.011	30 - 65	0.016	40 - 75	0.018	45 - 90	0.019	50 - 100	0.021	55 - 115	0.022	
	15 - 25	0.002	20 - 40	0.004	25 - 50	0.006	30 - 65	0.008	40 - 75	0.009	45 - 90	0.010	50 - 100	0.012	55 - 115	0.014	
	15 - 25	0.004	20 - 40	0.006	25 - 50	0.008	30 - 65	0.012	40 - 75	0.013	45 - 90	0.014	50 - 100	0.015	55 - 115	0.017	
	15 - 25	0.003	20 - 40	0.005	25 - 50	0.007	30 - 65	0.009	40 - 75	0.011	45 - 90	0.013	50 - 100	0.015	55 - 115	0.017	
	15 - 25	0.002	20 - 40	0.004	25 - 50	0.006	30 - 65	0.008	40 - 75	0.009	45 - 90	0.010	50 - 100	0.012	55 - 115	0.014	

NEW

Type C - Z3 - Slot milling

MILLING WITH INTEGRATED COOLING | CUTTING DATA OVERVIEW

Slot milling



Materials group	Material	Mat. no.	DIN	AISI/ASTM/UNS	Cutting edge geometry	
P	Unalloyed carbon steel $R_m < 800 \text{ N/mm}^2$	1.0301	C10	AISI 1010	GEOMETRY S	
		1.0401	C15	AISI 1015		
		1.1191	C45E/CK45	AISI 1045		
		1.0044	S275JR	AISI 1020		
		1.0715	11SMn30	AISI 1215		
	Low alloyed steel $R_m > 900 \text{ N/mm}^2$	1.5752	15NiCr13	ASTM 3415 / AISI 3310		
		1.7131	16MnCr5	AISI 5115		
		1.3505	100Cr6	AISI 52100		
		1.7225	42CrMo4	AISI 4140		
		1.2842	90MnCrV8	AISI O2		
	High alloyed tool steel $R_m < 1200 \text{ N/mm}^2$	1.2379	X153CrMoV12	AISI D2		
		1.2436	X210CrW12	AISI D4/D6		
		1.3343	HS6-5-2C	AISI M2 / UNS T11302		
		1.3355	HS18-0-1	AISI T1 / UNS T12001		
M	Stainless steel ferritic	1.4016	X6Cr17	AISI 430 / UNS S43000	GEOMETRY S	
		1.4105	X6CrMoS17	AISI 430F		
	Stainless steel martensitic	1.4034	X46Cr13	AISI 420C		
		1.4112	X90CrMoV18	AISI 440B		
	Stainless steel martensitic – PH	1.4542	X5CrNiCuNb16-4	AISI 630 / ASTM 17-4 PH		
		1.4545	X5CrNiCuNb15-5	ASTM 15-5 PH		
	Stainless steel austenitic	1.4301	X5CrNi18-10	AISI 304		
		1.4435	X2CrNiMo18-14-3	AISI 316L		
K	Cast iron	1.4441	X2CrNiMo18-15-3	AISI 316LM		
		1.4539	X1NiCrMoCu25-20-5	AISI 904L		
		0.6020	GG20	ASTM 30	GEOMETRY S	
		0.6030	GG30	ASTM 40B		
		0.7040	GGG40	ASTM 60-40-18		
N	Aluminium alloy wrought	0.7060	GGG60	ASTM 80-60-03		
		3.2315	AlMgSi1	ASTM 6351	GEOMETRY S	
	Aluminium alloy cast	3.4365	AlZnMgCu1.5	ASTM 7075		
		3.2163	GD-AlSi9Cu3	ASTM A380		
	Copper	3.2381	GD-AlSi10Mg	UNS A03590		
		2.0040	Cu-OF / CW008A	UNS C10100		
	Brass lead free	2.0065	Cu-ETP / CW004A	UNS C11000		
		2.0321	CuZn37 CW508L	UNS C27400		
	Brass, Bronze $R_m < 400 \text{ N/mm}^2$	2.0360	CuZn40 CW509L	UNS C28000		
		2.0401	CuZn39Pb3 / CW614N	UNS C38500		
	Bronze $R_m < 600 \text{ N/mm}^2$	2.1020	CuSn6	UNS C51900		
		2.0966	CuAl10Ni5Fe4	UNS C63000		
		2.0960	CuAl9Mn2	UNS C63200		
S₁	Super alloys	2.4856		Inconel 625	GEOMETRY SX	
		2.4668		Inconel 718		
		2.4617	NiMo28	Hastelloy B-2		
		2.4665	NiCr22Fe18Mo	Hastelloy X		
S₂	Titanium pure	3.7035	Gr.2	ASTM B348 / F67	GEOMETRY S	
		3.7065	Gr.4	ASTM B348 / F68		
	Titanium alloys	3.7165	TiAl6V4	ASTM B348 / F136	GEOMETRY S	
		9.9367	TiAl6Nb7	ASTM F1295		
S₃	CoCr alloys	2.4964	CoCr20W15Ni	Haynes 25	GEOMETRY SX	
			CrCoMo28	ASTM F1537		
H₁	Hardened steel $< 55 \text{ HRC}$	1.2510	100MnCrMoW4	AISI O1		
H₂	Hardened steel $\geq 55 \text{ HRC}$	1.2379	X153CrMoV12	AISI D2		

v_c [m/min]
 f_z [mm]

RECOMMENDATION FOR USE

● Excellent | ● Good | ○ Acceptable | ⊗ Not recommended

P	N	S ₃	
M	S ₁	H ₁	
K	S ₂	H ₂	

a_p		0.2 mm		0.3 mm		0.4 mm 1/64"		0.5 mm		0.6 mm		0.7 mm		0.8 mm 1/32"		0.9 - 1.0 mm	
		v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z
0.2 x d_1		15 - 25	0.003	20 - 40	0.005	25 - 50	0.007	30 - 65	0.010	40 - 75	0.012	45 - 90	0.014	50 - 100	0.016	55 - 115	0.018
		15 - 25	0.003	20 - 40	0.005	25 - 50	0.007	30 - 65	0.010	40 - 75	0.012	45 - 90	0.014	50 - 100	0.016	55 - 115	0.018
		15 - 25	0.002	20 - 40	0.004	25 - 50	0.006	30 - 65	0.008	40 - 75	0.009	45 - 90	0.011	50 - 100	0.013	55 - 115	0.015
0.2 x d_1		15 - 25	0.003	20 - 40	0.005	25 - 50	0.007	30 - 65	0.010	40 - 75	0.012	45 - 90	0.014	50 - 100	0.016	55 - 115	0.018
		15 - 25	0.003	20 - 40	0.005	25 - 50	0.007	30 - 65	0.010	40 - 75	0.012	45 - 90	0.014	50 - 100	0.016	55 - 115	0.018
		15 - 25	0.002	20 - 40	0.004	25 - 50	0.006	30 - 65	0.008	40 - 75	0.009	45 - 90	0.011	50 - 100	0.013	55 - 115	0.015
		15 - 25	0.002	20 - 40	0.004	25 - 50	0.006	30 - 65	0.008	40 - 75	0.009	45 - 90	0.011	50 - 100	0.013	55 - 115	0.015
0.2 x d_1		15 - 25	0.002	20 - 40	0.004	25 - 50	0.006	30 - 65	0.008	40 - 75	0.009	45 - 90	0.011	50 - 100	0.013	55 - 115	0.015
0.2 x d_1		15 - 25	0.004	20 - 40	0.007	25 - 50	0.009	30 - 65	0.012	40 - 75	0.013	45 - 90	0.015	50 - 100	0.016	55 - 115	0.017
		15 - 25	0.004	20 - 40	0.007	25 - 50	0.009	30 - 65	0.012	40 - 75	0.013	45 - 90	0.015	50 - 100	0.016	55 - 115	0.017
		15 - 25	0.004	20 - 40	0.007	25 - 50	0.009	30 - 65	0.012	40 - 75	0.013	45 - 90	0.015	50 - 100	0.016	55 - 115	0.017
		15 - 25	0.004	20 - 40	0.007	25 - 50	0.009	30 - 65	0.012	40 - 75	0.013	45 - 90	0.015	50 - 100	0.016	55 - 115	0.017
		15 - 25	0.004	20 - 40	0.007	25 - 50	0.009	30 - 65	0.012	40 - 75	0.013	45 - 90	0.015	50 - 100	0.016	55 - 115	0.017
		15 - 25	0.004	20 - 40	0.007	25 - 50	0.009	30 - 65	0.012	40 - 75	0.013	45 - 90	0.015	50 - 100	0.016	55 - 115	0.017
0.1 x d_1		15 - 25	0.002	20 - 40	0.003	25 - 50	0.004	30 - 65	0.005	40 - 75	0.007	45 - 90	0.008	50 - 100	0.009	55 - 115	0.010
0.2 x d_1		15 - 25	0.002	20 - 40	0.004	25 - 50	0.006	30 - 65	0.008	40 - 75	0.009	45 - 90	0.011	50 - 100	0.013	55 - 115	0.015
0.2 x d_1		15 - 25	0.003	20 - 40	0.005	25 - 50	0.007	30 - 65	0.010	40 - 75	0.012	45 - 90	0.014	50 - 100	0.016	55 - 115	0.018
0.2 x d_1		15 - 25	0.002	20 - 40	0.003	25 - 50	0.004	30 - 65	0.005	40 - 75	0.007	45 - 90	0.008	50 - 100	0.009	55 - 115	0.010


NEW

Type C - Z4 - Side milling - Semi-finishing

MILLING WITH INTEGRATED COOLING | CUTTING DATA OVERVIEW


Side milling

Semi-finishing





$$a_p = 1.5 \times d_1$$

$$a_e = 0.05 \times d_1$$



Note:

In case of helical interpolation milling
see α_{max} on page 35



Materials group	Material	Mat. no.	DIN	AISI/ASTM/UNS	Cutting edge geometry	
P	Unalloyed carbon steel $R_m < 800 \text{ N/mm}^2$	1.0301	C10	AISI 1010	GEOMETRY S	
		1.0401	C15	AISI 1015		
		1.1191	C45E/CK45	AISI 1045		
		1.0044	S275JR	AISI 1020		
		1.0715	11SMn30	AISI 1215		
	Low alloyed steel $R_m > 900 \text{ N/mm}^2$	1.5752	15NiCr13	ASTM 3415 / AISI 3310		
		1.7131	16MnCr5	AISI 5115		
		1.3505	100Cr6	AISI 52100		
		1.7225	42CrMo4	AISI 4140		
		1.2842	90MnCrV8	AISI O2		
	High alloyed tool steel $R_m < 1200 \text{ N/mm}^2$	1.2379	X153CrMoV12	AISI D2		
		1.2436	X210CrW12	AISI D4/D6		
		1.3343	HS6-5-2C	AISI M2 / UNS T11302		
		1.3355	HS18-0-1	AISI T1 / UNS T12001		
M	Stainless steel ferritic	1.4016	X6Cr17	AISI 430 / UNS S43000	GEOMETRY S	
		1.4105	X6CrMoS17	AISI 430F		
	Stainless steel martensitic	1.4034	X46Cr13	AISI 420C		
		1.4112	X90CrMoV18	AISI 440B		
	Stainless steel martensitic – PH	1.4542	X5CrNiCuNb16-4	AISI 630 / ASTM 17-4 PH		
		1.4545	X5CrNiCuNb15-5	ASTM 15-5 PH		
	Stainless steel austenitic	1.4301	X5CrNi18-10	AISI 304		
		1.4435	X2CrNiMo18-14-3	AISI 316L		
K	Cast iron	1.4441	X2CrNiMo18-15-3	AISI 316LM	GEOMETRY S	
		1.4539	X1NiCrMoCu25-20-5	AISI 904L		
		0.6020	GG20	ASTM 30		
		0.6030	GG30	ASTM 40B		
		0.7040	GGG40	ASTM 60-40-18		
N	Aluminium alloy wrought	0.7060	GGG60	ASTM 80-60-03	GEOMETRY S	
		3.2315	AlMgSi1	ASTM 6351		
	Aluminium alloy cast	3.4365	AlZnMgCu1.5	ASTM 7075		
		3.2163	GD-AlSi9Cu3	ASTM A380		
	Copper	3.2381	GD-AlSi10Mg	UNS A03590		
		2.0040	Cu-OF / CW008A	UNS C10100		
	Brass lead free	2.0065	Cu-ETP / CW004A	UNS C11000		
		2.0321	CuZn37 CW508L	UNS C27400		
	Brass, Bronze $R_m < 400 \text{ N/mm}^2$	2.0360	CuZn40 CW509L	UNS C28000		
		2.0401	CuZn39Pb3 / CW614N	UNS C38500		
	Bronze $R_m < 600 \text{ N/mm}^2$	2.1020	CuSn6	UNS C51900		
		2.0966	CuAl10Ni5Fe4	UNS C63000		
S₁	Super alloys	2.0960	CuAl9Mn2	UNS C63200	GEOMETRY SX	
		2.4856		Inconel 625		
		2.4668		Inconel 718		
		2.4617	NiMo28	Hastelloy B-2		
S₂	Titanium pure	2.4665	NiCr22Fe18Mo	Hastelloy X	GEOMETRY S	
		3.7035	Gr.2	ASTM B348 / F67		
	Titanium alloys	3.7065	Gr.4	ASTM B348 / F68	GEOMETRY S	
		3.7165	TiAl6V4	ASTM B348 / F136		
S₃	CoCr alloys	9.9367	TiAl6Nb7	ASTM F1295	GEOMETRY SX	
		2.4964	CoCr20W15Ni	Haynes 25		
H₁ H₂	Hardened steel $< 55 \text{ HRC}$		CrCoMo28	ASTM F1537		
	Hardened steel $\geq 55 \text{ HRC}$	1.2510	100MnCrMoW4	AISI O1		
		1.2379	X153CrMoV12	AISI D2		

v_c [m/min]
 f_z [mm]

RECOMMENDATION FOR USE

● Excellent | ● Good | ○ Acceptable | ⊗ Not recommended

P	N	S ₃
M	S ₁	H ₁
K	S ₂	H ₂

Ød ₁												
0.4 mm 1/64"		0.5 mm		0.6 mm		0.7 mm		0.8 mm 1/32"		0.9 - 1.0 mm		
v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	
45 - 75	0.012	55 - 95	0.015	65 - 115	0.018	75 - 130	0.021	90 - 150	0.024	100 - 170	0.027	
45 - 75	0.012	55 - 95	0.015	65 - 115	0.018	75 - 130	0.021	90 - 150	0.024	100 - 170	0.027	
45 - 75	0.008	55 - 95	0.011	65 - 115	0.014	75 - 130	0.016	90 - 150	0.019	100 - 170	0.022	
45 - 75	0.012	55 - 95	0.015	65 - 115	0.018	75 - 130	0.021	90 - 150	0.024	100 - 170	0.027	
45 - 75	0.012	55 - 95	0.015	65 - 115	0.018	75 - 130	0.021	90 - 150	0.024	100 - 170	0.027	
45 - 75	0.012	55 - 95	0.015	65 - 115	0.018	75 - 130	0.021	90 - 150	0.024	100 - 170	0.027	
45 - 75	0.008	55 - 95	0.011	65 - 115	0.014	75 - 130	0.016	90 - 150	0.019	100 - 170	0.022	
45 - 75	0.012	55 - 95	0.015	65 - 115	0.018	75 - 130	0.021	90 - 150	0.024	100 - 170	0.027	
45 - 75	0.013	55 - 95	0.015	65 - 115	0.016	75 - 130	0.018	90 - 150	0.020	100 - 170	0.022	
45 - 75	0.013	55 - 95	0.015	65 - 115	0.016	75 - 130	0.018	90 - 150	0.020	100 - 170	0.022	
45 - 75	0.013	55 - 95	0.015	65 - 115	0.016	75 - 130	0.018	90 - 150	0.020	100 - 170	0.022	
45 - 75	0.013	55 - 95	0.015	65 - 115	0.016	75 - 130	0.018	90 - 150	0.020	100 - 170	0.022	
45 - 75	0.013	55 - 95	0.015	65 - 115	0.016	75 - 130	0.018	90 - 150	0.020	100 - 170	0.022	
45 - 75	0.013	55 - 95	0.015	65 - 115	0.016	75 - 130	0.018	90 - 150	0.020	100 - 170	0.022	
45 - 75	0.008	55 - 95	0.010	65 - 115	0.012	75 - 130	0.014	90 - 150	0.016	100 - 170	0.018	
45 - 75	0.009	55 - 95	0.011	65 - 115	0.014	75 - 130	0.016	90 - 150	0.019	100 - 170	0.022	
45 - 75	0.009	55 - 95	0.011	65 - 115	0.014	75 - 130	0.016	90 - 150	0.019	100 - 170	0.022	
45 - 75	0.008	55 - 95	0.010	65 - 115	0.012	75 - 130	0.014	90 - 150	0.016	100 - 170	0.018	


NEW

Type C - Z4 - Side milling - Finishing

MILLING WITH INTEGRATED COOLING | CUTTING DATA OVERVIEW


Side milling

Finishing





$$a_p = 1.5 \times d_1$$

$$a_e = 0.02 \times d_1$$



Note:

In case of helical interpolation milling
see α_{max} on page 35



Materials group	Material	Mat. no.	DIN	AISI/ASTM/UNS	Cutting edge geometry	
P	Unalloyed carbon steel $R_m < 800 \text{ N/mm}^2$	1.0301	C10	AISI 1010	GEOMETRY S	
		1.0401	C15	AISI 1015		
		1.1191	C45E/CK45	AISI 1045		
		1.0044	S275JR	AISI 1020		
		1.0715	11SMn30	AISI 1215		
	Low alloyed steel $R_m > 900 \text{ N/mm}^2$	1.5752	15NiCr13	ASTM 3415 / AISI 3310		
		1.7131	16MnCr5	AISI 5115		
		1.3505	100Cr6	AISI 52100		
		1.7225	42CrMo4	AISI 4140		
		1.2842	90MnCrV8	AISI O2		
	High alloyed tool steel $R_m < 1200 \text{ N/mm}^2$	1.2379	X153CrMoV12	AISI D2		
		1.2436	X210CrW12	AISI D4/D6		
		1.3343	HS6-5-2C	AISI M2 / UNS T11302		
		1.3355	HS18-0-1	AISI T1 / UNS T12001		
M	Stainless steel ferritic	1.4016	X6Cr17	AISI 430 / UNS S43000	GEOMETRY S	
		1.4105	X6CrMoS17	AISI 430F		
	Stainless steel martensitic	1.4034	X46Cr13	AISI 420C		
		1.4112	X90CrMoV18	AISI 440B		
	Stainless steel martensitic – PH	1.4542	X5CrNiCuNb16-4	AISI 630 / ASTM 17-4 PH		
		1.4545	X5CrNiCuNb15-5	ASTM 15-5 PH		
	Stainless steel austenitic	1.4301	X5CrNi18-10	AISI 304		
		1.4435	X2CrNiMo18-14-3	AISI 316L		
K	Cast iron	1.4441	X2CrNiMo18-15-3	AISI 316LM	GEOMETRY S	
		1.4539	X1NiCrMoCu25-20-5	AISI 904L		
		0.6020	GG20	ASTM 30		
		0.6030	GG30	ASTM 40B		
		0.7040	GGG40	ASTM 60-40-18		
N	Aluminium alloy wrought	0.7060	GGG60	ASTM 80-60-03	GEOMETRY S	
		3.2315	AlMgSi1	ASTM 6351		
	Aluminium alloy cast	3.4365	AlZnMgCu1.5	ASTM 7075		
		3.2163	GD-AlSi9Cu3	ASTM A380		
	Copper	3.2381	GD-AlSi10Mg	UNS A03590		
		2.0040	Cu-OF / CW008A	UNS C10100		
	Brass lead free	2.0065	Cu-ETP / CW004A	UNS C11000		
		2.0321	CuZn37 CW508L	UNS C27400		
	Brass, Bronze $R_m < 400 \text{ N/mm}^2$	2.0360	CuZn40 CW509L	UNS C28000		
		2.0401	CuZn39Pb3 / CW614N	UNS C38500		
	Bronze $R_m < 600 \text{ N/mm}^2$	2.1020	CuSn6	UNS C51900		
		2.0966	CuAl10Ni5Fe4	UNS C63000		
S₁	Super alloys	2.0960	CuAl9Mn2	UNS C63200	GEOMETRY SX	
		2.4856		Inconel 625		
		2.4668		Inconel 718		
		2.4617	NiMo28	Hastelloy B-2		
S₂	Titanium pure	2.4665	NiCr22Fe18Mo	Hastelloy X	GEOMETRY S	
		3.7035	Gr.2	ASTM B348 / F67		
	Titanium alloys	3.7065	Gr.4	ASTM B348 / F68	GEOMETRY S	
		3.7165	TiAl6V4	ASTM B348 / F136		
S₃	CoCr alloys	9.9367	TiAl6Nb7	ASTM F1295	GEOMETRY SX	
		2.4964	CoCr20W15Ni	Haynes 25		
H₁ H₂	Hardened steel $< 55 \text{ HRC}$		CrCoMo28	ASTM F1537		
	Hardened steel $\geq 55 \text{ HRC}$	1.2510	100MnCrMoW4	AISI O1		
		1.2379	X153CrMoV12	AISI D2		

v_c [m/min]
 f_z [mm]

RECOMMENDATION FOR USE

● Excellent | ● Good | ○ Acceptable | ⊗ Not recommended

P	N	S ₃
M	S ₁	H ₁
K	S ₂	H ₂

Ød ₁												
0.4 mm 1/64"		0.5 mm		0.6 mm		0.7 mm		0.8 mm 1/32"		0.9 - 1.0 mm		
v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	v_c	f_z	
45 - 75	0.007	55 - 95	0.008	65 - 115	0.010	75 - 130	0.012	90 - 150	0.014	100 - 170	0.016	
45 - 75	0.007	55 - 95	0.008	65 - 115	0.010	75 - 130	0.012	90 - 150	0.014	100 - 170	0.016	
45 - 75	0.004	55 - 95	0.006	65 - 115	0.008	75 - 130	0.009	90 - 150	0.011	100 - 170	0.012	
45 - 75	0.006	55 - 95	0.008	65 - 115	0.010	75 - 130	0.012	90 - 150	0.014	100 - 170	0.016	
45 - 75	0.006	55 - 95	0.008	65 - 115	0.010	75 - 130	0.012	90 - 150	0.014	100 - 170	0.016	
45 - 75	0.006	55 - 95	0.008	65 - 115	0.010	75 - 130	0.012	90 - 150	0.014	100 - 170	0.016	
45 - 75	0.004	55 - 95	0.006	65 - 115	0.008	75 - 130	0.009	90 - 150	0.011	100 - 170	0.012	
45 - 75	0.007	55 - 95	0.008	65 - 115	0.010	75 - 130	0.012	90 - 150	0.014	100 - 170	0.016	
45 - 75	0.008	55 - 95	0.008	65 - 115	0.010	75 - 130	0.011	90 - 150	0.012	100 - 170	0.012	
45 - 75	0.008	55 - 95	0.008	65 - 115	0.010	75 - 130	0.011	90 - 150	0.012	100 - 170	0.012	
45 - 75	0.008	55 - 95	0.008	65 - 115	0.010	75 - 130	0.011	90 - 150	0.012	100 - 170	0.012	
45 - 75	0.008	55 - 95	0.008	65 - 115	0.010	75 - 130	0.011	90 - 150	0.012	100 - 170	0.012	
45 - 75	0.008	55 - 95	0.008	65 - 115	0.010	75 - 130	0.011	90 - 150	0.012	100 - 170	0.012	
45 - 75	0.008	55 - 95	0.008	65 - 115	0.010	75 - 130	0.011	90 - 150	0.012	100 - 170	0.012	
45 - 75	0.002	55 - 95	0.004	65 - 115	0.004	75 - 130	0.005	90 - 150	0.006	100 - 170	0.007	
45 - 75	0.004	55 - 95	0.006	65 - 115	0.008	75 - 130	0.009	90 - 150	0.011	100 - 170	0.012	
45 - 75	0.004	55 - 95	0.006	65 - 115	0.008	75 - 130	0.009	90 - 150	0.011	100 - 170	0.012	
45 - 75	0.002	55 - 95	0.004	65 - 115	0.004	75 - 130	0.005	90 - 150	0.006	100 - 170	0.007	

NEW

Process

PRECISE AND EFFICIENT MILLING

Coolant type, pressure and filtration


Coolant: For best results, Mikron Tool recommends cutting oil as coolant. Alternatively, an emulsion of 8% or more with EP additives (Extreme-Pressure-Additives) can be used as well.

Filter: The large cooling channels allow a standard filter with a quality of ≤ 0.05 mm.

Coolant pressure: At least 25 bar coolant pressure is required for reliable milling. High pressure is generally better for the cooling and flushing effect.


Revolution	[rpm]	$\leq 10,000$	$> 10,000$
Minimal pressure	[bar]	25	35

Climb milling and conventional milling



For side milling, Mikron Tool recommends climb milling. The chip thickness is greater at the beginning and decreases continuously, and the cutting forces remain low. With conventional milling, however, high cutting forces would push the milling tool away from the workpiece. Thus, the surface quality and precision of the workpiece decrease.

Side milling




Recommended cutting parameters

v_c and f_z = as indicated in the cutting data table

	Type B – Z3	Type C – Z3	Type B – Z4	Type C – Z4
Roughing	$a_p = 1 \times d$ $a_e = 0.2 \times d$	$a_p = 1 \times d$ $a_e = 0.1 \times d$	-	-
Semi-finishing	-	-	$a_p = 1.5 \times d$ $a_e = 0.1 \times d$	$a_p = 1.5 \times d$ $a_e = 0.05 \times d$
Finishing	-	-	$a_p = 1.5 \times d$ $a_e = 0.02 \times d$	$a_p = 1.5 \times d$ $a_e = 0.02 \times d$


Milling with helical interpolation




Helical interpolation is the best and gentlest way for immersion. Note that the minimum diameter to be produced must be $1.3 \times d_1$. The minimum and maximum helical interpolation angle α depends on the material (see table).

Recommended helical interpolation angles

	Material	α - Helical interpolation	
		min	max
P	Unalloyed and alloyed steels	5°	15°
M	Stainless steels	5°	10°
K	Cast irons	5°	15°
N	Aluminum and non ferrous metals	10°	30°
S₁	Super alloys	2°	8°
S₂	Titanium pure and titanium alloys	2°	8°
S₃	CoCr alloys	2°	8°

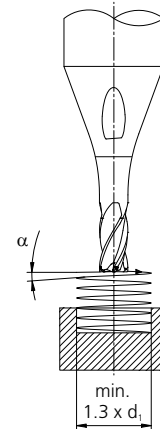

Slot milling



For slot milling, Mikron Tool recommends **indirect entry**. During milling with direct entry into the material, very thick chips are produced and the milling tool is subject to asymmetrical stress until it is working with its entire diameter in the material. These stresses can affect the service life of cutting edges.

Recommended cutting parameters

v_c and f_z : as specified in the cutting data table

Note

The recommended $a_{p,max}$ values should not be exceeded

Headquarter and Production

MIKRON SWITZERLAND AG, AGNO

Division Tool

Via Campagna 1

6982 Agno

Switzerland

Phone +41 91 610 40 00

mto@mikron.com

Production and Regrinding

MIKRON GERMANY GMBH

Abteilung Werkzeuge

Berner Feld 71

78628 Rottweil

Germany

Phone +49 741 5380 450

info.mtr@mikron.com

North and South America Sales

MIKRON CORP. MONROE

200 Main Street

Monroe, CT 06468

USA

Phone +1 203 261 3100

mmo@mikron.com

China Sales

米克朗刀具（上海）有限公司

MIKRON TOOL (SHANGHAI) CO., LTD.

Room A209, Building 3,

No. 526, 3rd East Fute Road,

Shanghai, 200131

P. R. China

Phone +86 21 2076 5671

mtc@mikron.com

地址：中国（上海）自由贸易试验区

中国上海市富特东三路526号3号楼第二层

A209室

邮编：200131

Website



Youtube



Linkedin



www.mikrontool.com

Information and technical data are liable to changes without prior notification.

Mikron® is a trademark of Mikron Holding AG, Biel (Switzerland).



2.MKTG.00660 - 07.2022 - EU - EN